



## INSTALLATION INSTRUCTIONS

### 70-81 F-BODY

### Independent Rear Suspension

Please read these instructions *completely*  
**before** starting your installation.

**Assemble suspension on vehicle** before powder-coating to ensure proper fitment, and to make modifications if necessary.

For questions on installations please call 800-841-8188 In Illinois (847) 487-0150



### **Main Cradle Assembly**

5/8"-11 x 4" Hex Bolt	(4)
5/8" Washer, SAE	(4)
5/8"-11 Nylock Nut	(4)
1.38 Inch OD Bushings	(8)
7 Gauge washer	(4)

### **Front Pinion Support Tube**

1/2"-20 x 1-1/2" Hex Bolt	(2)
1/2"-20 Nylock Nut	(2)
5/8"-11 x 4" Hex Bolt	(2)
5/8"-11 Nylock Nut	(2)
5/8" Washers	(4)

### **Upper & Lower Control Arm Hardware**

5/8"-11 x 4" Hex Bolt	(6)
5/8"-11 x 6" Hex Bolt	(2)
5/8"-11 Nylock Nut	(8)
5/8" Washers	(16)
5/16"-24 x 1" Hex Bolt	(4)
5/16" AN Washers	(4)

### **Steering Arm Hardware**

5/8"-11 x 4" Hex Bolt	(2)
5/8"-11 x 3.25" Hex Bolt	(2)
5/8" Washer	(8)
5/8"x1/2" High Misalignment Rod End Bushings	(8)
5/8"-11 Nylock Nuts	(4)
3/4-16 Jam Nut, RH	(2)
3/4-16 Jam Nut, LH	(2)
Rod End, 3/4" Spherical Bearing 3/4-16 RH Thread	(2)
Rod End, 3/4" Spherical Bearing 3/4-16 LH Thread	(2)

### **Uprights, Left & Right**

1/2" Cam Bolt Adjuster Assembly	(2)
5/8"-11 x 4" Hex Bolt	(2)
5/8" Washers	(2)
5/8"11 Nylock Nuts	(2)

### **Hardware Kit (Continued)**

#### **Sway Bar, Rear**

1/2"-20 RH Male Rod End W/ Stud	(2)
1/2"-20 LH Female Rod End W/ Stud	(2)
1/2" Jam Nut	(2)
1/2"-20 x 2" Hex Bolt	(2)
1/2"-20 Nylock Nut	(4)
7/8" Diameter Anti-Roll Bar, Rear	(1)

For questions on installations please call 800-841-8188 In Illinois (847) 487-0150



Sway Bar Bushing Bracket & Bushings, Rear (2)  
3/8"-16 x 1.25" Hex Bolt (4)  
3/8" AN Washer (8)

**Brake Bracket Adapter**

3/8"-16 x 1.25" Button Head Bolt (6)  
3/8" AN Washers (12)  
3/8"-16 Nylock Nuts (6)

**C-4 Corvette Brake Option #1:**

C-4 Brake Caliper w/ integral parking Brake (2)  
C-4 Brake Caliper Bracket (2)  
Brake Bracket Adapter, C-4 Caliper to Upright (2)

**Wilwood Brake Caliper Option #2:**

Wilwood Forged Dynalite Brake Kit (2)  
Brake Bracket Adapter, Single Caliper (2)

**Wilwood Brake Caliper and Mechanical Parking Brake Option #3:**

Wilwood Forged Dynalite Brake Kit (2)  
MC4 Mechanical Parking Brake Calipers (2)  
Brake Bracket Adapter, Dual Caliper (2)

**Rotor Options:**

C-4 Plain Rotors, Steel (2)  
Dimple Drilled & Slotted, Coated, Black  
Wilwood, Plain Rotors  
Wilwood, Drilled & Slotted Rotors

**High HP CV Shafts** (2)

**CV Shaft Hardware**

M10X1.5X 80MM Socket Head Cap Screws (12)  
M10 Split Lock Washers (12)

For questions on installations please call 800-841-8188 In Illinois (847) 487-0150



- 1) Start by jacking up your car and supporting it on sturdy jack stands. Remove the exhaust, driveshaft, axle, and any associated suspension/ brake components. Be sure to clean the frame rails and any areas surrounding the mounting points for the IRS. Position the left and right saddles onto the rear frame rails as seen below. You will use the two lower holes in the outside of the frame rails to properly locate the right and left saddles.




- 2) Nest assemble the rear end center section. Install the stub axle seals into the housing. Insert one seal into each side of the housing ends, with lips of the seal pointing inward, slowly tap the seals in until they bottom out on the shoulder of the bore. A seal installation tool will ensure that the seals are installed square and flush to the housing step. Do not tap on the seal directly, as the mallet could deform the seal.




For questions on installations please call 800-841-8188 In Illinois (847) 487-0150

- 3) Install the 3<sup>RD</sup> member using the 3/8" x 1-1/4" long threaded bolts and AN washers. Install using the Ford 9" third member gasket and/or gasket sealer. **Torque to 40 ft-lbs.** The front pinion plate can be installed after the 3<sup>rd</sup> member sealant has cured. Remove the five front bolts from the pinion retainer cover. Install the pinion mounting plate on the pinion carrier as shown below. Reuse bolts and washers that were just removed. Use thread locker on the bolts. **Torque the 3/8 bolts 35-40 ft-lbs**

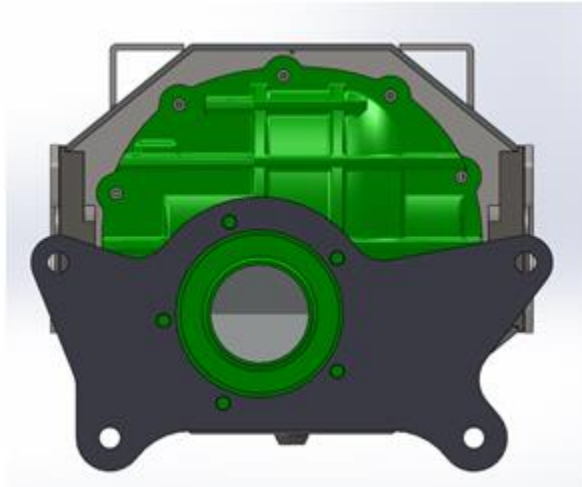


- 4) Now install the stub axles into the housing using white grease on the splines. The longer stub axle goes into the passenger side. Slide the stub axle into the housing until the bearing bottoms out in the housing bore. Next install the bearing retainer plates using the 3/8"-16 x1" long bolts and washers. **Torque the 3/8" bolts to 40 ft-lbs.**

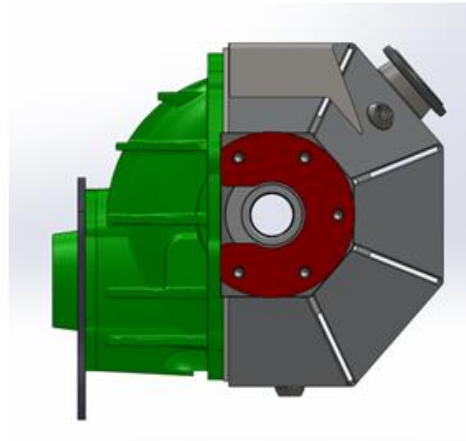

For questions on installations please call 800-841-8188 In Illinois (847) 487-0150



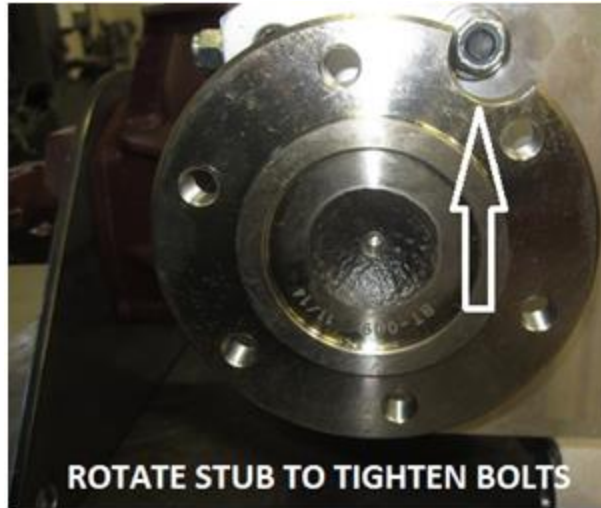

- 5) Install the Center section into the IRS Cradle.
- 6) Assemble the bushings and sleeves into the upper cradle mounts and install the vent and drain plugs. NOTE this would now be a good time to fill the center section with fluid.



For questions on installations please call 800-841-8188 In Illinois (847) 487-0150



- 7) Install the upper and lower control arms onto the IRS cradle.



- 8) Next install the aluminum CV adapter spacer, to the end of the half shafts and use the twelve M10 x 80mm long bolts and split lock washer to fully install the CV joint axles to the axle stubs. Use thread locker on the bolt and **Torque to 51-57 ft-lbs**



- 9) Install the outer bearing hub assemblies using the six M12 x 60mm long bolts and washers on the uprights. If the hub assembly does not seat flush against upright, carefully open the hole using a barrel sander. Use thread locker on the M12 x 60mm bolts. **Torque bolts to 65 ft-lbs**

For questions on installations please call 800-841-8188 In Illinois (847) 487-0150





- 10) Next insert the eight polyurethane bushings in to the left and right uprights. Then insert the four bushing sleeves, use grease to help installation. **Note:** If you opted for the bearing upgrade you will be installing them at this time



- 11) Install the upright to the lower control arm. Apply grease to the splines of the CV axles. Install the axles into the bearing assemblies until the CV joint bottoms out against the hubs. Place the nut back onto the threads but DO NOT tighten.

For questions on installations please call 800-841-8188 In Illinois (847) 487-0150





- 12) Next use the Cam adjuster bolts to attach the upper control arms to the uprights. Make sure the Cam bolt washers fit into the "C" shaped grooves welded on each side of the uprights. At this time you can tighten the axle nut




- 13) Then install the steering arms, placing the steel spacer on the rear side, and the two misalignment spacers on each end of the rod ends. Attach the steering arms to the main cradle and then the uprights where you will only have the misalignment spacers.

For questions on installations please call 800-841-8188 In Illinois (847) 487-0150





Drivers Side

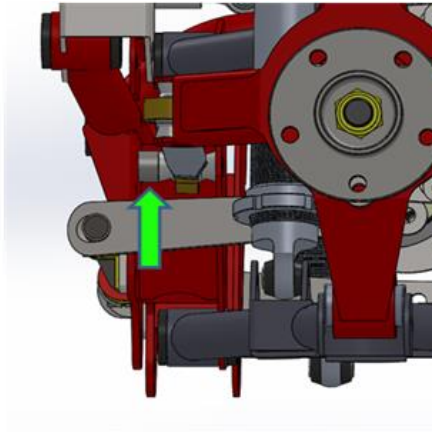

Passenger Side



Drivers Side

- 14) Position the IRS assembly under the vehicle and bolt to the 4 upper mounting brackets. You can now install your assembled coil overs
- 15) Assemble the front pinion support install them to the IRS assembly and then position them on the saddle tab located on the frame rail. Drill the mounting holes through the tab and bolt together. See pictures on next page
- 16) At this point you can reinstall your driveshaft, exhaust, and any other ancillary components you removed. Be sure to recheck and tighten all your bolts.

For questions on installations please call 800-841-8188 In Illinois (847) 487-0150






For questions on installations please call 800-841-8188 In Illinois (847) 487-0150




There are three different brake options that are available for the IRS. The first option includes: the C-4 Corvette calipers with integrated parking brake. The second option includes the Wilwood calipers, no parking brake. The third is option is the Wilwood brake calipers with mechanical parking brake caliper. Each option has its own brake caliper mount, make sure your kit has the correct mount.

### **Brake Option 1:**

The following are instructions to install the C-4 calipers. Use the six 3/8"-16 x 1.25" button head screws, washers and nylock nuts. Fasten the brake caliper adapter to the outside side mount located on the front side of the uprights. **Torque the 3/8" bolts to 20 ft-lbs.** Next slide the rear rotors on over the wheel studs, then install the C-4 brake caliper brackets. Note the rear rotor are fastened though the clamping force of the lug nuts after you install the rear wheels. Use the four supplied M12x20mm Flange bolts to fasten the C-4 Caliper mount brackets to the adapter. **Torque bolts to 131 ft-lbs**

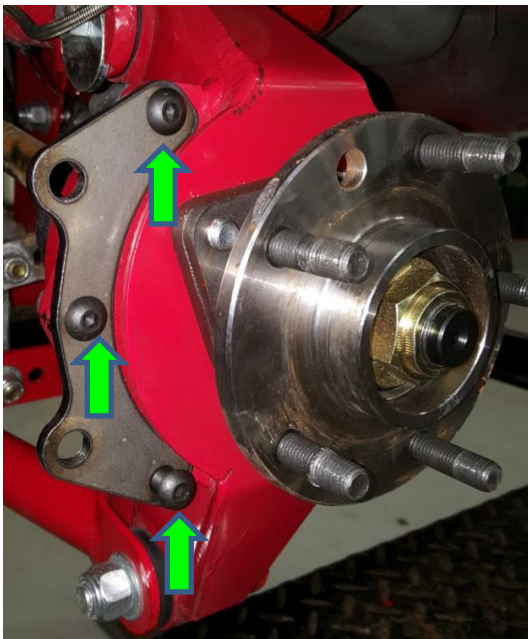

**Brake Caliper Adapter**

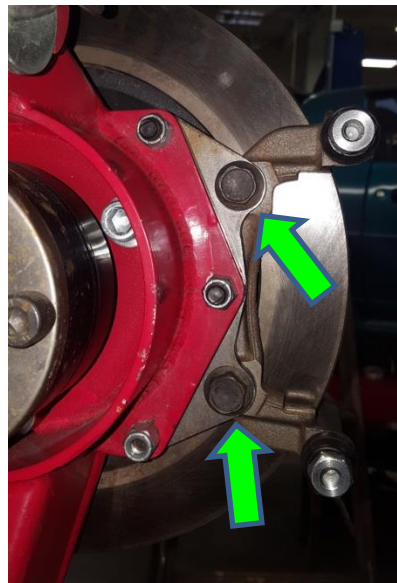


**C-4 Brake Caliper Mount**

For questions on installations please call 800-841-8188 In Illinois (847) 487-0150



Install the brake pads as shown note the pad with the anti-rattle clip goes on the inside of the rotor. Next install the brake caliper, make sure that the two torsional springs on the pads are preloaded evenly against the underside of the brake caliper. Note the torsional springs hold the pads down into the caliper bracket and are necessary so the pads don't get knocked out of place and wear unevenly. Use the two M8x20mm long bolts to attach the brake caliper to the caliper pin sliders. We recommend you use thread locker on these bolts or safety wire the bolts so they don't come loose.

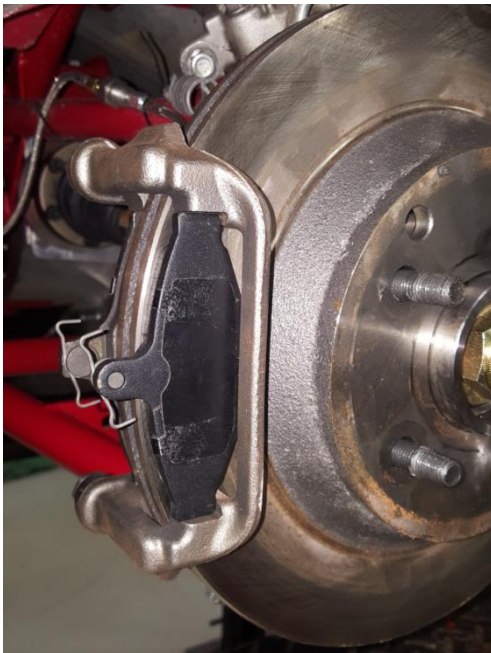

For questions on installations please call 800-841-8188 In Illinois (847) 487-0150




## **Brake Option 2:**

The following instructions are for mounting Wilwood brake calipers. We recommend reading through the instructions that come with the Wilwood brake kit. First use the six supplied 3/8"-16 x 1.25" long button head screws, washers and nylock nuts to mount the caliper adapter to the outside side mount located on the uprights. **Torque these 3/8" bolts to 20 ft-lbs,**

Then slide the rear rotors on over the wheel studs. Next install the brake calipers, use the four 3/8"-24 x 1.25" long hex bolts, .063" thick washers and .032" shim washers to mount the calipers, to the caliper adapter bracket. Use the .032" shim washers to space the caliper it is positioned on center with the brake rotor. Use thread locker on the caliper bolts. Thread the bolts into the caliper brackets. Spread the end of the cotter pin in. **Torque bolts to 20 ft-lbs..**

Reference the Wilwood instructions for correct caliper spacing diagram and verify the alignment is correct. Note each caliper adapter bracket should have two clinch nuts that are pressed into it. Make sure the clinch nuts are facing away from the center of the car. See the Wilwood instruction diagrams for more details. These instructions can also be found online if they are missing from your kit. Don't forget to slide in the brake pads and cotter pin and spread the cotter pin ends.

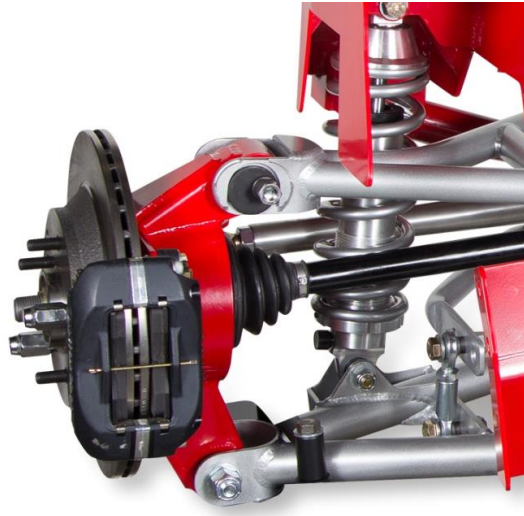

For questions on installations please call 800-841-8188 In Illinois (847) 487-0150



### **Option 3:**

The third option uses both the Wilwood brake caliper and MC4 Mechanical parking brake. Both calipers mount on the same adapter bracket. Follow the instructions listed above in [Option 2](#) for mounting the brake calipers. Then refer to the Wilwood instructions for mounting MC4 parking brake calipers.



**2<sup>nd</sup> Brake Rotor Options** If you have the dimple drilled and slotted rotors, pay close attention to the arrow on the rotors. The wide aperture slots on these brakes are designed to draw cool air under the brake pad and rotor interface and help cool the temperature of the brake pad during heavy braking.

If you have the Spec 37 Rotors look for the small directional arrow located on the inside of the rotor and mount accordingly. When attaching the C-4 brake hat to the rotor use removable thread locker on the 5/16-18 button head Torx head screws. Follow the recommended break in procedure provided in Wilwood instructions.

For questions on installations please call 800-841-8188 In Illinois (847) 487-0150




After you have installed your brake choice you can run your new lines and bleed the system.

Now on to the rear sway bar, mount the sway bar bushing and brackets on the bar. Use the two rectangular sway bar spacers in between the cradle and the sway bar mounts. Use the four 3/8"-16 x 1.25" long hex bolts, 3/8" AN washers and 3/8" Nylock nuts to attach the sway bar mounts to the rear of the main cradle. **Torque the four 3/8" bolts to 20 ft-lbs,**



**Rear Sway Bar**

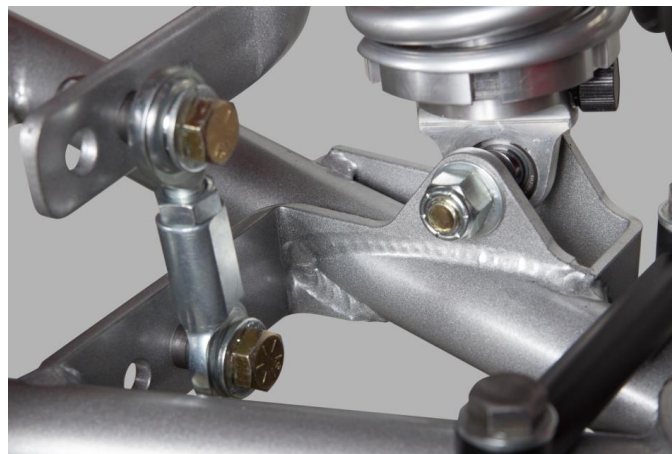

**Sway Bar, Spherical Bearing Rod End links**

Assemble the spherical bearing rod end links as shown. There are three pairs of holes that can be used to change the rear sway bar rate. Move the link toward the front of the car softens the

For questions on installations please call 800-841-8188 In Illinois (847) 487-0150



sway bar rate. Moving the rod end rearward stiffens the sway bar rate. Note you can vary the left and right side to get in between rates for a total of six different bar rates, one being the disconnected, i.e. no rate.

Finally, you are ready to set the alignment of your vehicle. Be sure to do so with the arms and shocks set at ride height (the lower control arms should be 1 to 2 degree going downhill towards the wheels). You may want to take you car to an alignment shop for an alignment. If you have a digital angle finder and toe plate and want to align it yourself it's pretty easy. Start by loosen the cam bolt adjuster nut located in the top upright adjuster to set camber. The cam bolts are on eccentric cams, so when the bolts are rotated about the center, the cams will tilt the upright and vary your camber. When you achieve your desired camber setting; tighten the cam nut assembly down to lock the setting in place. Just be sure that both sides have equal camber settings, or the car will tend to pull to one side and have uneven tire wear.

To set the vehicle toe, loosen up the jam nut on each side of the steering arm. Turn the steering arm to set the toe to the specification below. Use the machined flats on steering arms to lengthen or shorten the link. When you achieve your desired toe setting, lock both jam nuts down while holding the steering arm across the machined flats.

Here are the recommended alignment specifications:

## **Alignment Specifications:**

**Camber: 0° - .5° Negative**

**Toe: 0 - 1/16 Toe-In**

Since you are now to the point where you have a finished, running truck it is time to test drive it. After a few hundred miles, double check the ride height and the alignment. The springs may have settled, which would change the ride height. Re-adjust the ride height before changing the alignment. After this initial setting period, the springs and bushings should have pretty much taken their final set, so you should be on your way to many miles of cruising in style.

For questions on installations please call 800-841-8188 In Illinois (847) 487-0150



For questions on installations please call 800-841-8188 In Illinois (847) 487-0150

